



Gear Oil

Technical Data Sheet (TDS)


HOLSTEIN GL-1

Tajhiz Niroo Zangan is a public stock company and manufacturer of various lubrication products, used in automotive, industrial and marine equipment, including gasoline and diesel engine oils, gear oils, hydraulic fluids, compressor oils, locomotive oils, greases, heavy-duty marine diesel engine oils, trunk piston oils, cylinder oils, antifreeze, ...



SAE 90

API GL-1

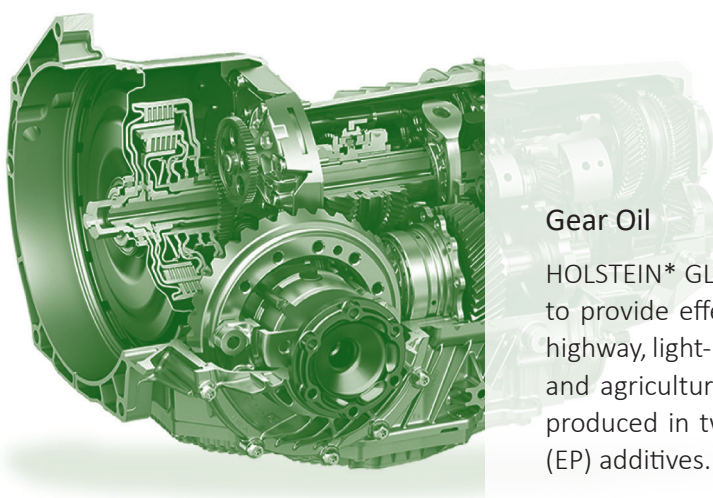

Gear Oil

HOLSTEIN* GL-1 is a good performance gear lubricant, designed to provide effective lubrication in a wide range of gears in off-highway, light- and heavy-duty equipment in construction, mining and agriculture, under moderate conditions. HOLSTEIN GL-1 is produced in two types: simple and including extreme pressure (EP) additives.

Advantages

- Formulated from high-quality base stocks and extreme pressure (EP) additives
- Effective high-load carrying capacity
- Reliable lubrication of components
- Suitable anti-foam property

SAE 90, API GL-1

Specification	Vis @ 100 °C cSt	VI -	Flash Point °C	Pour Point °C (Max)	Density @ 15 °C kg/m ³	Foam after Sequence I, II, III, ml
Typical	16	100	215	-12	880	Nil
ASTM Test Method	D 445	D 2270	D 92	D 97	D 1298	D 892

*HOLSTEIN: A powerful, precise and technical horse, monarch of dressage and show jumping