TNZ

Since 1999

Gasoline Engine Oil

Technical Data Sheet (TDS)

MUSTANG

Tajhiz Niroo Zangan is a public stock company and manufacturer of various lubrication products, used in automotive, industrial and marine equipment, including gasoline and diesel engine oils, gear oils, hydraulic fluids, compressor oils, locomotive oils, greases, heavy-duty marine diesel engine oils, trunk piston oils, cylinder oils, antifreeze, ...

1L 4L 5L

SAE 5W-20
API SN

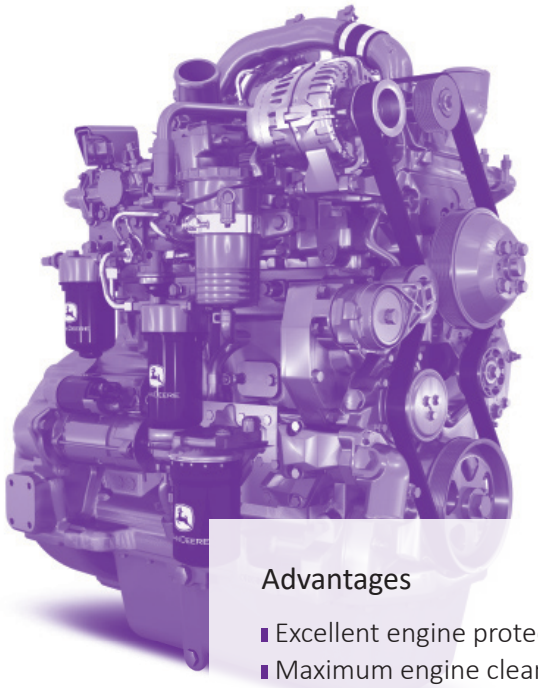

Gasoline Engine Oil

MUSTANG* is a full-synthetic high-mileage lubricant, formulated by the best synthetic base stocks and high qualified additives, supporting the requirements of API SN. MUSTANG is designed for use in the most modern gasoline engine cars, manufactured after 2011, and require excellent protection of engine parts in severe operating conditions.

Advantages

- Excellent engine protection especially against wear and corrosion
- Maximum engine cleanliness and minimum sludge formation
- Exceptional oxidation and thermal stability
- Outstanding low temperature and start-up fluidity
- Excellent protection of catalyst
- Improving engine efficiency
- Increase of engine's lifetime
- Extended oil change interval
- Reducing fuel consumption

SAE 5W-20, API SN

Specification	Vis @ 100 °C cSt	VI -	Flash Point °C	Pour Point °C (Max)	TBN mg KOH/g (Min)	Density @ 15 °C kg/m³	CCS @ -30 °C cP
Typical	7.5	160	220	-36	6	847	4300
ASTM Test Method	D 445	D 2270	D 92	D 97	D 2896	D 1298	D 5293

*MUSTANG: Feral and powerful horse, used for long distances